



GC723A / GC724B

Cable and Antenna Analyzer



GC723A / GC724B

Cable and Antenna Analyzer

Introduction

A large number of abnormal cell site problems are typically caused by the antenna system, cable and connectors, or both. It's important to have the right instrument available when either servicing or certifying cell sites for operation.

The GC723A and GC724B Cable and Antenna Analyzers are the optimal portable diagnostic tool needed to accurately detect operational problems in cell sites.

The GC723A and GC724B have all of the measurement functions necessary to accurately verify the site's antenna system from VSWR to power measurements.

In addition, the GC723A and GC724B make distance-to-fault measurements in order to accurately locate the fault's location.

A touch panel operation with a 7" color display allows measurements to be easily made and displayed.

Its application specific software, GCViewer, allows the user to easily compare and analyze measurements and generate professional reports.

The GC723A and GC724B were designed for field testing operation and are equipped with a rechargeable field replaceable lithium-ion battery, which enables continuous operation for more than three hours.

Key Measurements

- VSWR
- DTF (Distance to Fault)
- Cable Loss
- Power Meter

Features

- Portable and lightweight instrument < 2.0kg (4.4lbs)
- Handheld operation
- Built-in worldwide RF signal standards and frequency bands
- 7 inch TFT color display (viewable in daylight)
- Easy to operate through touch screen
- Superior immunity to RF interferences
- Up to 1001 data points to locate long distance problems
- External USB memory capability
- Up to 6 trace markers
- Saves up to 20 user definable setups
- Interface with application software, GCViewer, for data management
- Saves up to 400 measurement traces
- Saves up to 100 measurement screens
- Alphanumeric labeling of saved measurements
- Automatic time stamps of saved data
- Rechargeable and field replaceable lithium-ion battery



Main Functions*


GC723A / GC724B Cable and Antenna Analyzer

* All specifications are common for both GC723A and GC724B, otherwise specified.

VSWR

The GC723A and GC724B make high resolution VSWR measurements



- Frequency Range
 - GC723A: 100 ~ 2700MHz
 - GC724B: 25 ~ 4000MHz
- Dynamic Range: 60dB
- High resolution mode with 1001 points
- Built-in over 80 worldwide RF signal standards
- Registers user definable RF bands into a Custom band list
- Provides an alarm limit line

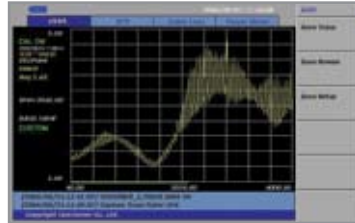

DTF (Distance to Fault)

The DTF measurement function allows users to accurately identify faulty locations



- Frequency Range
 - GC723A: 100 ~ 2700MHz
 - GC724B: 25 ~ 4000MHz
- Distance: Up to 1250m (4125ft)
- Dynamic Range: 60dB
- Built-in over 95 standard cable characteristics
- Registers user definable cables into a Custom cable list



Cable Loss

Cable Loss measures the energy absorbed or lost by the transmission line, it facilitates users to analyze the cable characteristics and the signal loss throughout the transmission line

- Frequency Range
 - GC723A: 100 ~ 2700MHz
 - GC724B: 25 ~ 4000MHz
- Dynamic Range: 0 ~ 30dB
- Provides an alarm limit line



Power Meter

The Power Meter function makes power measurements with optional power sensors displaying the results in dBm or Watts


- Plug and play external power sensors
- Upper limit can be set for Pass/Fail indication
- Power sensor types:
 - Directional Power Sensor
 - Terminating Power Sensor



Application Software


The GC723A and GC724B Application Software, GCViewer, provides all the necessary tools to operate the instrument more conveniently, including:

- Supports Smith Chart
- VSWR-Smith Chart Conversion
- Captures saved plots from the GC723A and GC724B
- Registers or edits user definable RF bands into a Custom bands list
- Registers or edits user definable cables into a Custom cables list
- Edits measurement charts
- Report template available
- Generates and prints reports




Supplementary Functions

- Captures up to 4 traces
- Overlays up to 4 traces in one screen
- Supports up to 6 markers simultaneously



Excellent Performance and Portability, Ideal for Field Testing

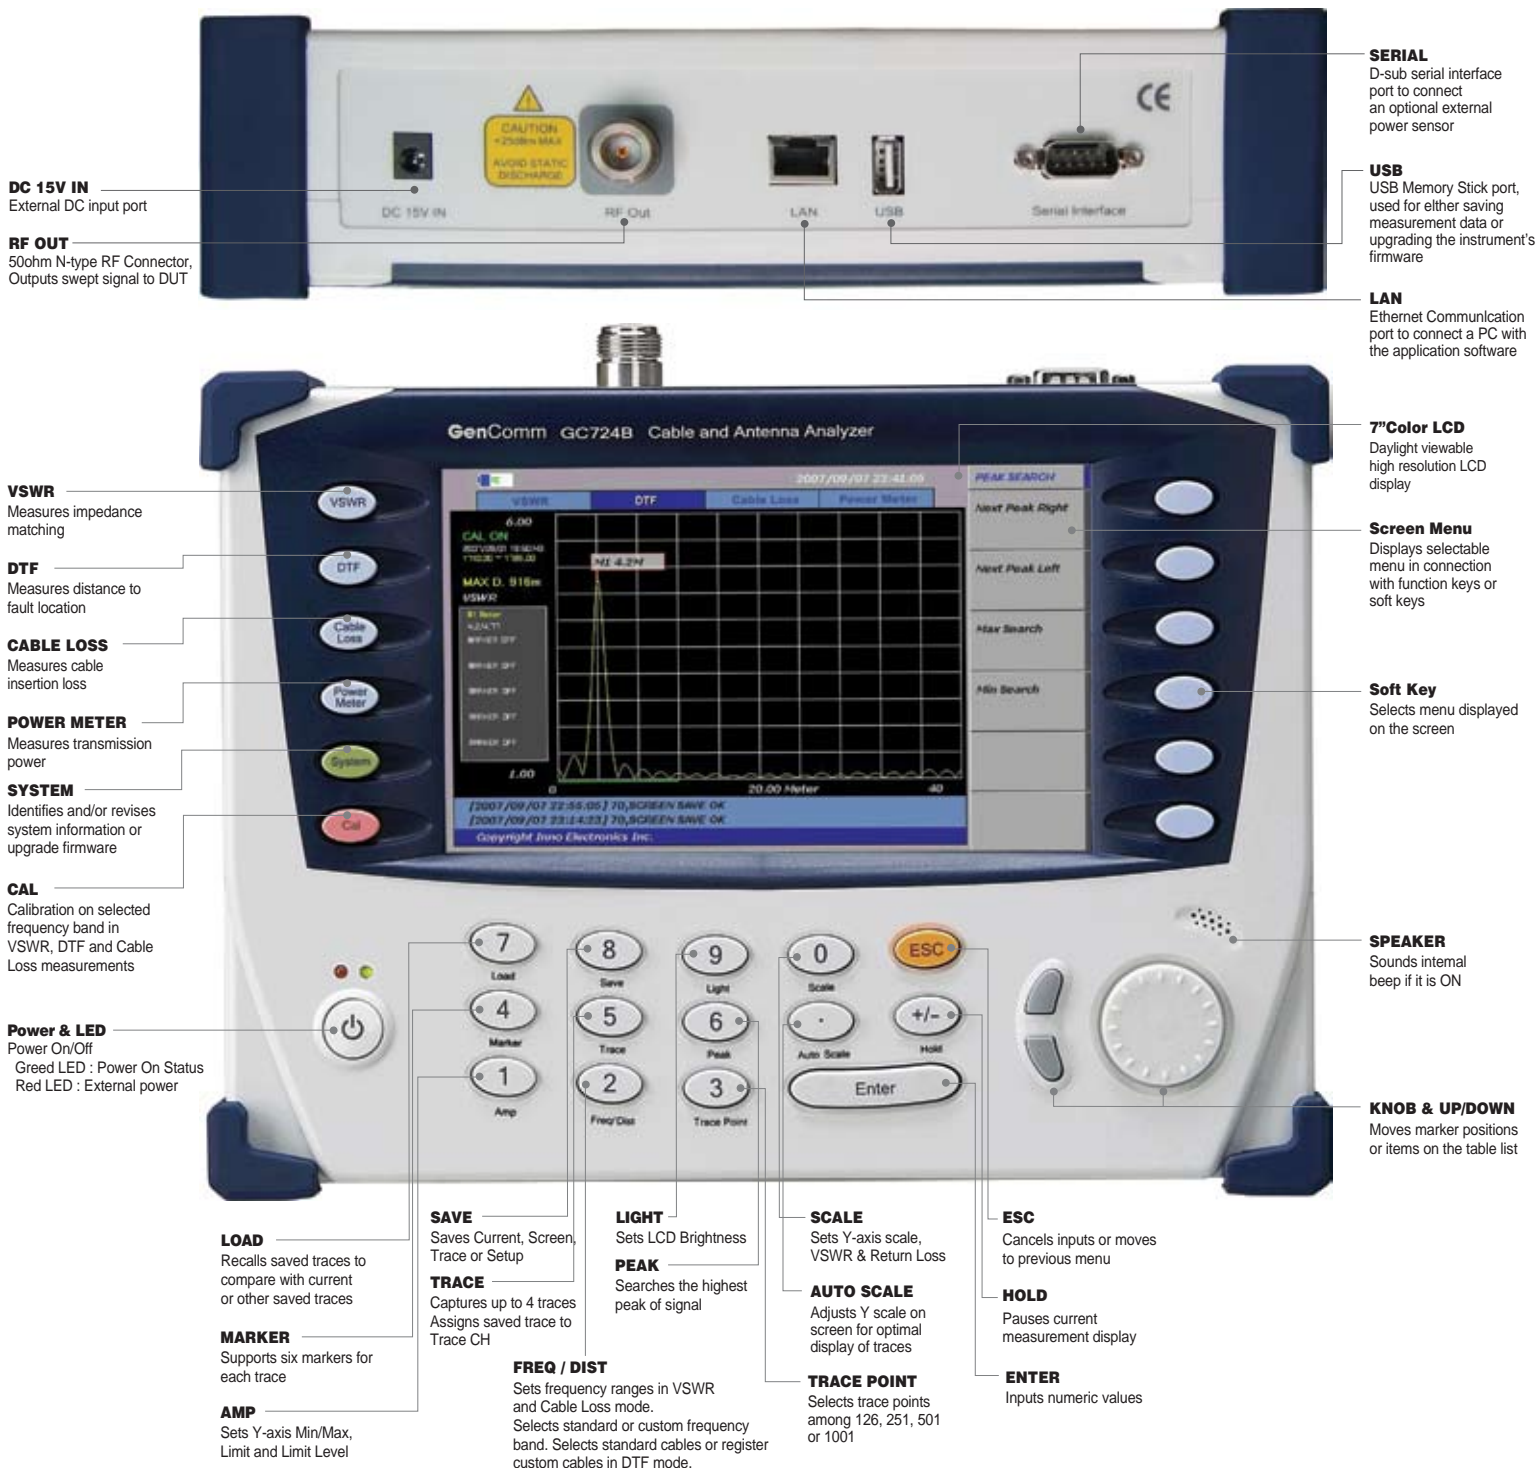

Specifications / Ordering Information

GC723A / GC724B Cable and Antenna Analyzer

Specifications

General	
Max Input Power	+25dBm
Frequency Accuracy	<±75ppm
Frequency Resolution	100kHz
Test Port Impedance	50Ω
Test Port	Type N, Female
Trace Storage	Up to 400
Screen Storage	Up to 100
Setup Storage	Up to 20
VSWR	
Frequency Range	25 ~ 4000MHz (GC724B) 100 ~ 2700MHz (GC723A)
Data Points	126, 251, 501, 1001
Return Loss	0 ~ 60dB
VSWR Range	1 ~ 65
Measurement Speed	1, 1.3, 2.5, 5sec for each data points
Cable Loss	
Frequency Range	25 ~ 4000MHz (GC724B) 100 ~ 2700MHz (GC723A)
Cable Loss Range	0 ~ 30dB
Resolution	0.01dB
DTF (Distance to Fault)	
Frequency Range	25 ~ 4000MHz (GC724B) 100 ~ 2700MHz (GC723A)
Distance	0 ~ 1250m (4125ft)
Horizontal Range	0 to (# of data points-1) x (resolution-1)/2
Resolution	$(1.5 \times 10^3)(V_p)/(\Delta ZF)$ V_p : cable's relative propagation velocity ΔZF [Hz] = Stop Freq - Start Freq ZF (Zoom Factor) = Setup Dist./Max Dist.
Return Loss	0 ~ 60dB
VSWR	1 ~ 65
Immunity to Interfering Signals	
On Frequency	+ 5dBm
On Channel	+ 17dBm

RF Power Meter (Requires GC731A or GC732A)	
Display Range	-80 ~ +80dBm
Offset Range	0 ~ 60dB
Resolution	0.01dB or 0.1xW
Directional Power Sensor (GC731A)	
Sensor Type	Average and Peak Power Sensors
Frequency Range	300 ~ 3800MHz
Measurement Range	Average : +21.76 ~ +51.76dBm (0.15 ~ 150W) Peak : +36.02 ~ +56.02dBm (4 ~ 400W)
Measurement Uncertainty	± 4% of reading above 35°C or below 15°C adds 3%
Input VSWR	300 ~ 3000MHz < 1.07 3000 ~ 3800MHz < 1.10
Connector Type	N, Female
Terminating Power Sensor (GC732A)	
Sensor Type	Average
Frequency Range	20 ~ 3800MHz
Measurement Range	-30 ~ +20dBm (1uW ~ 100mW)
Measurement Uncertainty	± 7%
Input VSWR	20 ~ 2500MHz < 1.12 2500 ~ 3800MHz < 1.25
Connector Type	N, Female
Miscellaneous	
Dimension	260 x 190 x 60mm (10.2" x 7.5" x 2.4")
Weight	< 2.0kg (4.4lbs) includes battery
Battery	Li-ion (>3hrs continuous operating)
Environmental Condition	
Operating Temperature	0 ~ 50 °C (32 ~ 122 °F)
Storage Temperature	-40 ~ 80 °C (-40 ~ 176 °F)
Humidity	95% No Condensation

Specifications and product description subject to change without notice

Ordering Information

Basic Models

- GC723A Cable and Antenna Analyzer (100 ~ 2700MHz)
- GC724B Cable and Antenna Analyzer (25 ~ 4000MHz)

Standard Accessories

- GC723-50541 : Soft Carrying Case
- GC724-50522 : AC-DC Adapter
- G7105-50335 : Cross LAN Cable (1.5m)
- GC723-50513 : 256MByte USB Memory
- GC724-50523 : Automotive Cigarette Lighter/12V DC Adapter
- GC724-50321 : Lithium-Ion Battery
- G7105-50316 : Stylus Pen
- GC723-50561 : User's Manual and Application Software CD

Optional Accessories

- GC724-50509 : Calibration Kit, 40dB, 4GHz
- GC724-50531 : RF Cable, 1.5m, N(m)-N(f)
- GC724-50532 : RF Cable, 3.0m, N(m)-N(f)
- GC724-50542 : Hard Case
- GC723-50562 : GC723A/GC724B User's Manual- Printed Version
- G7000-50571 : Adapter N(m) to DIN(f), DC to 7.5GHz, 50Ω
- G7000-50572 : Adapter DIN(m) to DIN(m), DC to 7.5GHz, 50Ω
- G7000-50573 : Adapter N(m) to SMA(f), DC to 18GHz, 50Ω
- G7000-50574 : Adapter N(m) to BNC(f), DC to 2GHz, 50Ω

High Accuracy Power Meter Accessories

- GC731A : Directional Power Sensor (300 ~ 3800MHz, Average Power +21.76 ~ +51.76dBm, Peak Power +36.02 ~ +56.02dBm)
- GC732A : Terminating Average Power Sensor (20 ~ 3800MHz, -30 ~ +20dBm)





GC723A
GC724B

Cable and Antenna Analyzer



Corporate Office

14 Floor E&C Dream Tower VII,
60-44 Gasan-Dong, Kumchun-Gu,
Seoul 153-801, Korea
Tel +82-2-6676-7070
Fax +82-2-6676-7040
Web www.gencomm.co.kr

Customer Support

Tel +82-2-6676-7090
Email support@gencomm.co.kr

Sales (Korea)

Tel +82-2-6676-7080
Email sales@gencomm.co.kr

**International Sales &
Marketing Office**

1159 Sonora Court
Sunnyvale, CA 94086, USA
Tel +1-408-694-3900
Email sales@gctm.net
Web www.gctm.net